

# ROCKVILLE

## A2BT AUX TO BLUETOOTH ADAPTER

### OWNER'S MANUAL

## ***WHO READS MANUALS?***

Instead, go to [vimeo.com/572677938](https://vimeo.com/572677938) or scan the QR code and watch a short video that shows you how to set this item up and how to use it.

**If you prefer written instructions, please read ahead!**

*With Rockville you get many options.*



**Missing items?** If you ordered a bundle that includes more than one product and you are missing part of your bundle, then it just means your order shipped from two different warehouses. You will receive the remaining items very soon. If you have any concerns or inquiries, feel free to call our customer support center at 1-646-758-0144, Monday through Thursday, 9am to 10pm EST, and Fridays, 9am to 3pm EST.


Thank you for purchasing this Rockville A2BT AUX to Bluetooth adapter. Please read this owner's manual carefully for proper use of your A2BT. Should you need assistance, please call our technical help line at 1-646-758-0144, Monday through Thursday, 9am to 10pm EST, or Fridays, 9am to 3pm EST.

## Includes

- AUX to Bluetooth adapter
- Micro USB charging cable
- 3.5mm to 3.5mm cable (23.6in)
- Detachable 3.5mm jack
- ¼" adapter for pro use
- Owner's manual
- Warranty card

## Functions

1. Power switch: Slide to the ON position to power the unit. Slide to the OFF position to turn it off.
2. Multifunction (MFB) button: Press the MFB once to begin or pause playback, answer an incoming call or end the call. Long press the MFB to reject a call. Press the MFB twice to redial the last number.
3. AUX port
4. Previous/Next buttons: Long press to raise or lower the volume. Short press for the previous or next track.
5. Microphone
6. Bluetooth/Charging LED indicator
7. DC 5V charging port

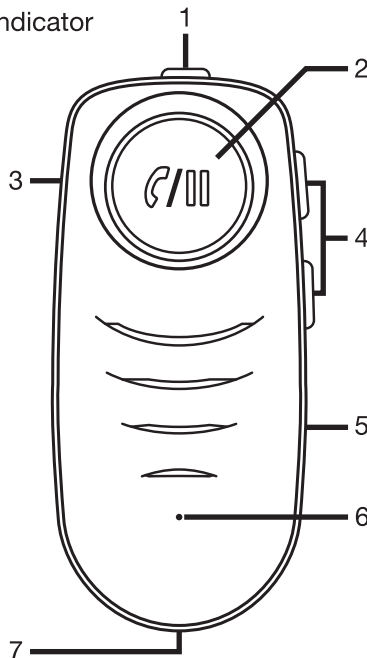

## Operation

### Bluetooth

1. Power on the receiver, the indicator light will flash blue and red indicating it is in pairing mode.
2. Turn on your device's Bluetooth function and make sure it is discoverable. Search for A2BT in the list of available devices and connect to it.
3. Connect the A2BT to your device's 3.5mm AUX input using the included 3.5mm cable or either one of the included adapters (3.5mm or 1/4") if necessary.
4. The A2BT will automatically connect with the last paired device. Please note, for the auto-connect function to work, your device's Bluetooth function must be on prior to turning on the A2BT.
5. You can use the A2BT to control playback and answer calls. You can also use your paired device to control playback or, if using a phone, answer calls.

### Connecting a Second Device

1. Connect the A2BT to the first device following the procedure above.
2. Once the first device is connected, turn off its Bluetooth function. The A2BT will go into pairing mode.
3. Turn on the second device's Bluetooth function and make sure it is discoverable. Search for A2BT in the list of available devices and connect to it.
4. Turn on the first device's Bluetooth function and make sure it is discoverable. Search for A2BT in the list of available devices and connect to it.
5. Now both devices are connected.

## Charging

1. When the A2BT battery's is nearly depleted, the LED indicator will intermittently flash red indicating that it needs to be charged.
2. Connect the unit to a DC 5V power source using the included micro USB cable. Do not use a power source higher than 5V. The LED will remain on during charging and will turn off once the unit is fully charged.

Please note: Fully charge the unit before using for the first time. If the unit will not be in for a prolonged period of time, charge it at least every three months.

## Features:

- Add Bluetooth to any system that has a 3.5MM or 1/4"
- Works with car stereos, home audio systems, and pro audio systems
- Bluetooth 5.0 chipset
- 35 Foot Bluetooth range
- Automatically pairs with your phone when turned on
- Built-in Digital Signal Processor (DSP) increases the sound quality
- Battery Life: around 10 Hours per charge
- Charge time: around 2 Hours
- Built-in microphone and multi function button to answer/redial/hang up/reject calls
- Can be paired with 2 devices at the same time.
- 110 mAh rechargeable battery

## Troubleshooting

| Problem   | Solution   |
|-----------|--|
| No power  | <ol style="list-style-type: none"><li>1. Make sure the power switch is in the ON position.</li><li>2. Make sure the unit is fully charged. Follow the charging procedures on page 3.</li></ol>   |
| No sound  | <ol style="list-style-type: none"><li>1. Make sure the unit is powered on and that it is fully charged.</li><li>2. Check all connections.</li></ol>  |
| Bluetooth | <ol style="list-style-type: none"><li>1. Check to see that both devices are turned on and that your device is discoverable.</li><li>2. Turn both devices off and then on again.</li><li>3. Make sure you've selected the proper source (A2BT).</li><li>4. Make sure that the Bluetooth device is within 5 feet of the unit.</li><li>5. Move both devices away from other Bluetooth devices, microwaves, wireless routers, and other electronics.</li><li>6. The BT signal can be affected by walls or other barriers. Make sure there is a clear line of sight between the A2BT and your device.</li></ol> |

## Federal Communications Commission Compliance Information

Responsible party name: Rockville

Address: 600 Bayview Ave.

Entrance A

Inwood, NY 11096

Hereby declares that the product A2BT complies with FCC rules as mentioned in the following paragraph:

These devices comply with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) these devices may not cause harmful interference, and (2) these devices must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.