


ROCKVILLE

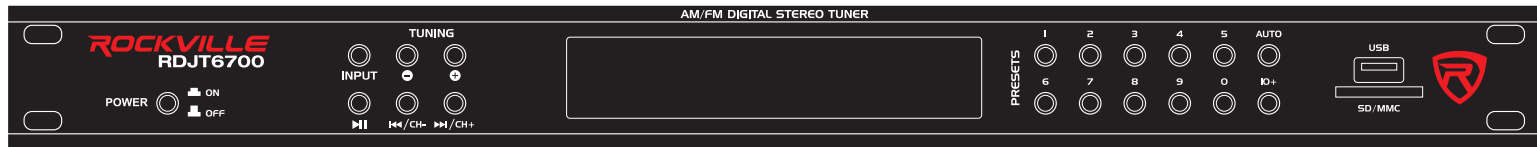

OWNER'S MANUAL

RDJT6700
PRO DJ AM/FM TUNER WITH MP3/SD PLAYBACK

ROCKVILLE


Thank you for purchasing this Rockville RDJT6700 Pro DJ AM/FM Tuner with MP3/SD Playback.

We are very proud to bring you what we consider to be the absolute best value line pro audio equalizers. This project has been a culmination of years of development involving a team of dreamers, engineers, designers and marketing gurus. Proudly conceived and developed in the USA, Rockville pro audio equalizers are designed and engineered by a team of music enthusiasts, DJ's and musicians.

We have spared no expense in manufacturing these equalizers to meet the highest quality standards. With proper care and installation this unit will provide you with the highest levels of sound quality. We hope that this unit will bring you years of performance and reliability.

Our goal to you and to your audience is to hear "live performance sound" the way it was meant to be experienced.

Please read this installation guide carefully for proper use of your Rockville RDJT6700 Pro DJ AM/FM Tuner with MP3/SD Playback. Should you need technical assistance please call our technical help line at 1-646-758-0144, Monday through Friday, 9am to 5pm EST.

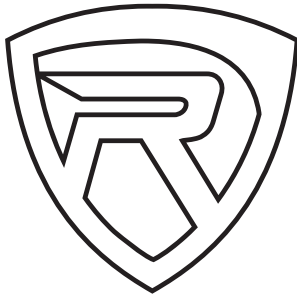

ROCKVILLE

FEATURES / SPECIFICATIONS

- 19" Rack Mount AM/FM Receiver
- 40 AM/40 FM Preset Station Capability
- Vacuum Fluorescent Display
- SD/MMC Card Reader
- USB Port for MP3 Media Input
- Auto Search/Scan Feature
- 1 RU Rack Mount
- Full Function Remote Control
- Dimensions: 19" x 1.5" x 9.5"
- FM Frequency Range: 87MHz - 108MHz
- AM Frequency Range: 530KHz - 1710KHz
- Input Impedance: 1K Ohm
- Signal to Noise Ratio: FM >45dB, MW >40dB
- Sensitivity: FM >20uV, MW >5mV/m
- Pre Amp Output Power: 500mV
- Power Consumption: 10 Watts
- 110/220 Volt Switchable Power Supply
- User Serviceable Fuse

TUNER OPERATION

Auto Scan: Press and hold Tuner + or Tuner - button for 2 seconds to scan stations.


Manual Search: Quickly press Tuner + or Tuner - to search stations in single increments.

Programing Stations: Once you've located the desired station, push and hold the MEMORY button on the remote control to save the station.

Selecting Programed Stations: Use number keys to select programed station. For numbers above 10, use the 10+ button. For example, to select programed station number 15, press the 10+ button and then the 5 button. To select programed station 28, press the 10+ button twice and then the 8 button. Use the same procedure for all other programed stations. Up to 40 stations can be saved.

REMOTE CONTROL FUNCTIONS


1. Direct frequency selection key. Push the key then use the number pad to select the desired station. For example, if you want to select the station 102.7FM Push the Select button then enter 10270 on the keypad.
2. Input select key. Allows you to cycle between AM/FM, USB and SD card input.
3. Frequency manual selection keys. These keys allow the user to move through the stations in single increments.
4. Number keys. Used to select programmed stations, store stations, and directly select frequencies. Please note 10 key can be used as 0 key as well.
5. MP3 previous/next selection keys.
6. MP3 play/pause key.
7. Tuner channel back key.
8. Mute key.
9. Display brightness adjustment keys.
10. Spectrum display mode select keys.
11. Stereo/mono selection key.
12. Auto search key.
13. Memory store key. Push this key to store desired stations.
14. Volume up key.
15. Tuner channel forward key.
16. Volume down key.

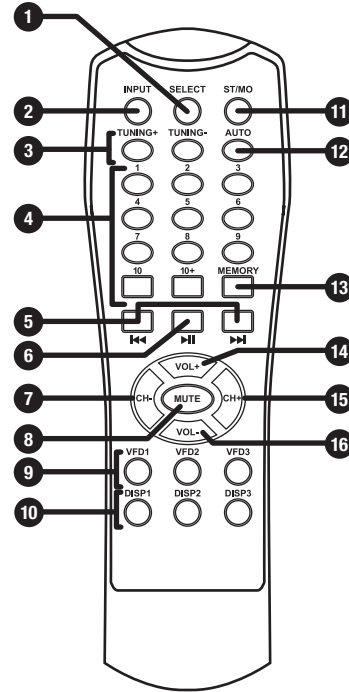

IMPORTANT SAFETY INSTRUCTIONS

- To reduce risk of electric shock, never open the unit. There are no user serviceable parts, refer service to an authorized Rockville service center.
- Do not expose this unit to any kind of moisture.
- Do not place this unit near heat sources or expose to direct sunlight.
- Do not place anything on top of unit. Doing so will block vents and cause the unit to overheat.
- Please ensure that the unit is situated in a properly ventilated area.


TUNER PANEL DESCRIPTION

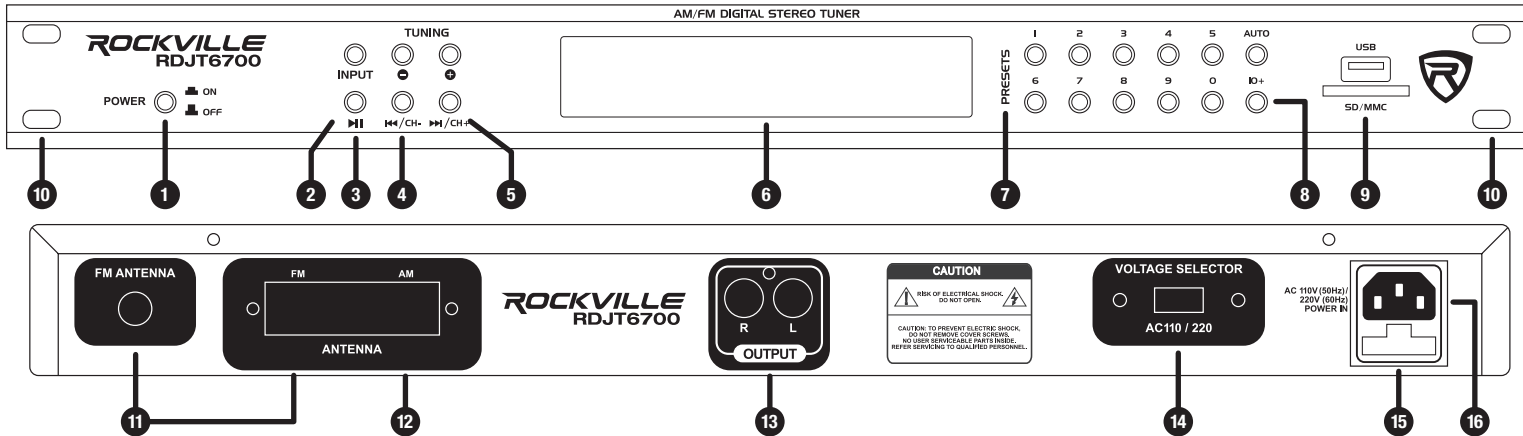

1. Power button
2. Input selector button (Tuner/USB/Card Reader)
3. MP3 play/pause button
4. MP3 track selection/tuner preset selection button
5. Tuner scan/manual selection buttons
6. Vacuum Fluorescent Display
7. Preset station selection buttons
8. Station save button
9. USB and SD/MMC ports
10. Rack mount points

11. FM Antennas
12. AM Antenna
13. RCA Audio out
14. Voltage selector switch (110v/220v)
15. User serviceable fuse
16. IEC AC power socket

ROCKVILLE

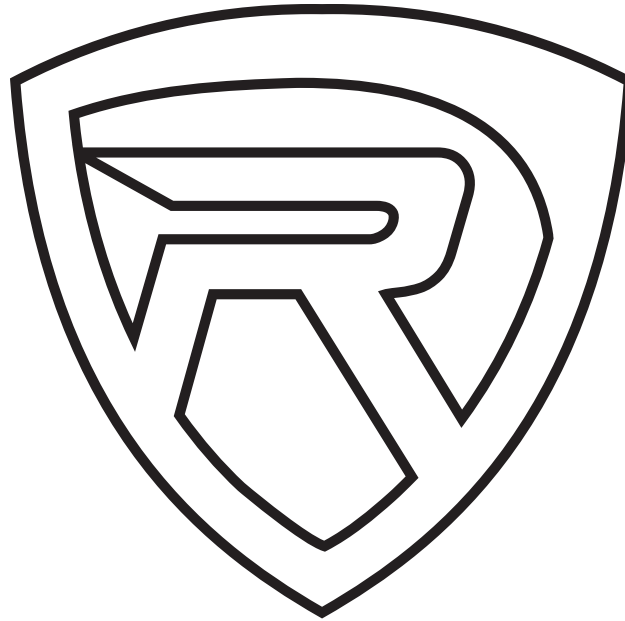

RockvillePro.com

© 2017 ROCKVILLE // Features and specifications are subject to change and or improvement without notice.