




# RT6

## 1 INCH SWIVEL SILK DOME NEO TWEETER

# INSTALLATION GUIDE



Thank you for purchasing this Rockville RT6 tweeter. Please read this installation guide carefully for proper use of your RT6. Should you need assistance, please call our technical help line at 1-646-758-0144, 24 hours a day/7 days a week. Alternately, scan the QR code or go to [rockvillesupport.com/rt6](http://rockvillesupport.com/rt6) to access an informational video, the installation guide, and other important information you may need to get the most out of your RT6.

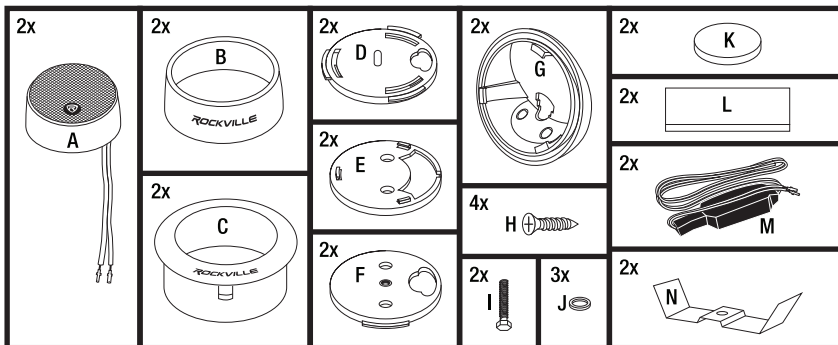

### SPECIFICATIONS

- Power RMS: 30 Watts Each/60 Watts Per Pair
- Peak Power: 120 Watts Each/240 Watts Per Pair
- Impedance: 4 Ohm
- Cutout Diameter: 2.00"
- Mounting Depth: 0.75"
- Frequency Response: 1.3KHz – 24KHz
- Sensitivity: 93dB @ 1w/1m

### FEATURES

- 1" Swivel Silk Dome Tweeters
- Complete Pair with Flush, Surface, and Angle Mount Hardware
- Neodymium Magnet
- Ferro-Fluid Cooled Voice Coil
- High Temperature ABS Housing
- In-Line Crossover Network

### INCLUDED

- A. Tweeter
- B. Tweeter housing
- C. Flush mount housing
- D. Tweeter housing backing
- E. Surface mount plate
- F. Flush mount plate
- G. Angle mount housing
- H. Mounting screws
- I. Flush mount screw
- J. Washer
- K. Circular adhesive foam pad
- L. Rectangular adhesive foam pad
- M. In-line crossover
- N. Flush mount anchor

CUT-OUT TEMPLATE, 1:1 SCALE  
DIAMETER: 2.00"

