


ROCKVILLE

R7EQ

**1/2 DIN 7 BAND CAR AUDIO EQUALIZER
w/FRONT, REAR, and SUB OUTPUT**

OWNER'S MANUAL

ATTENTION: WATCH THIS VIDEO BEFORE FIRST USE!



Scan the **QR code** or go to **rockvillesupport.com/r7eq** to access how-for essential information, guides (video and/or written), and tips to make the most out of your purchase.

If you prefer written instructions, please read ahead!

With Rockville you get many options.


Missing items? If you ordered a bundle that includes more than one product and you are missing part of your bundle then it just means your order shipped from two different warehouses. You will receive the remaining items very soon. If you have any concerns or inquiries, feel free to call our customer support center at 1-646-758-0144, 24 hours a day/7 days a week.

Thank you for purchasing this Rockville R7EQ ½ DIN 7 Band Car Audio Equalizer. Please read this owner's manual carefully for proper use of your Rockville R7EQ. Should you need assistance, please call our help line at 1-646-758-0144, 24 hours a day, 7 days a week.

Includes


- Equalizer
- Euroblock power connector
- Screws
- Bracket
- Owner manual
- Warranty card

Functions

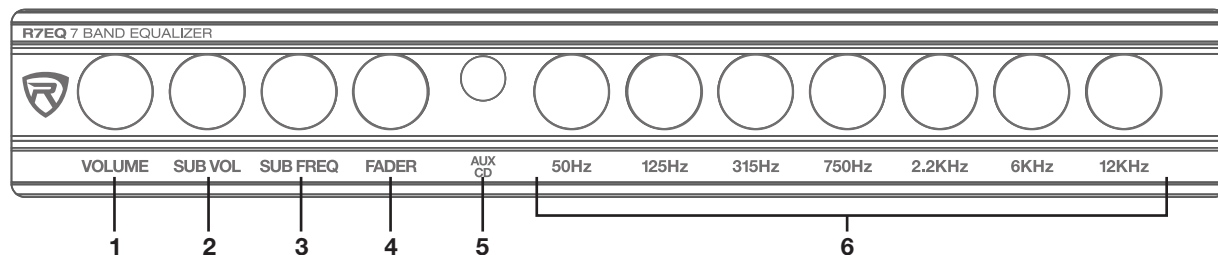


1. Volume: controls the output level
2. Sub Vol: controls the subwoofer output level
3. Sub Freq: controls the subwoofer frequency from 40Hz to 250Hz
4. Fader: controls the output level between the front and rear speakers in a 4 speaker system
5. Aux/CD: switch between auxiliary and CD input
6. Equalizer controls: controls the frequency boost or cut of the 7 bands

1. Subwoofer output
2. Rear output
3. Front output
4. CD input
5. Auxillary input
6. Power / remote / ground

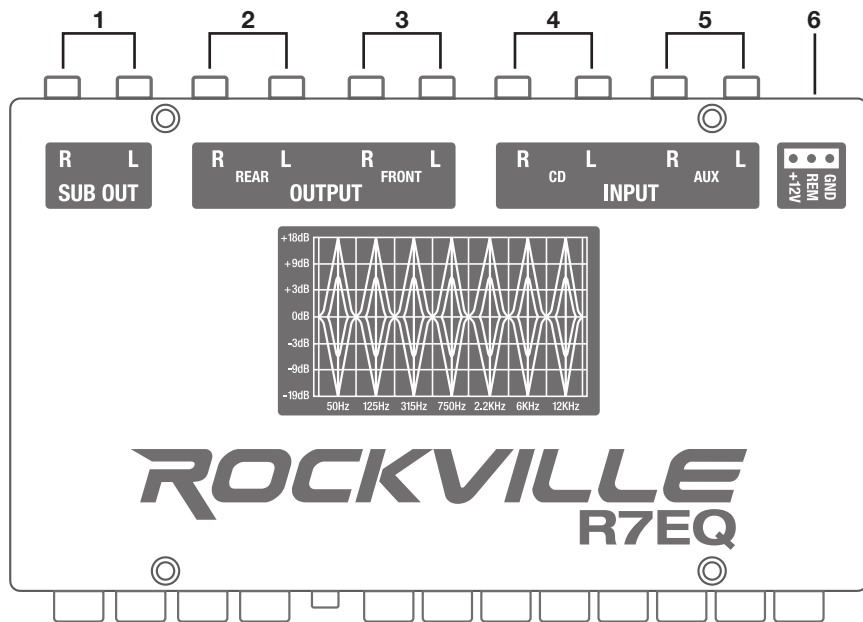


Connections

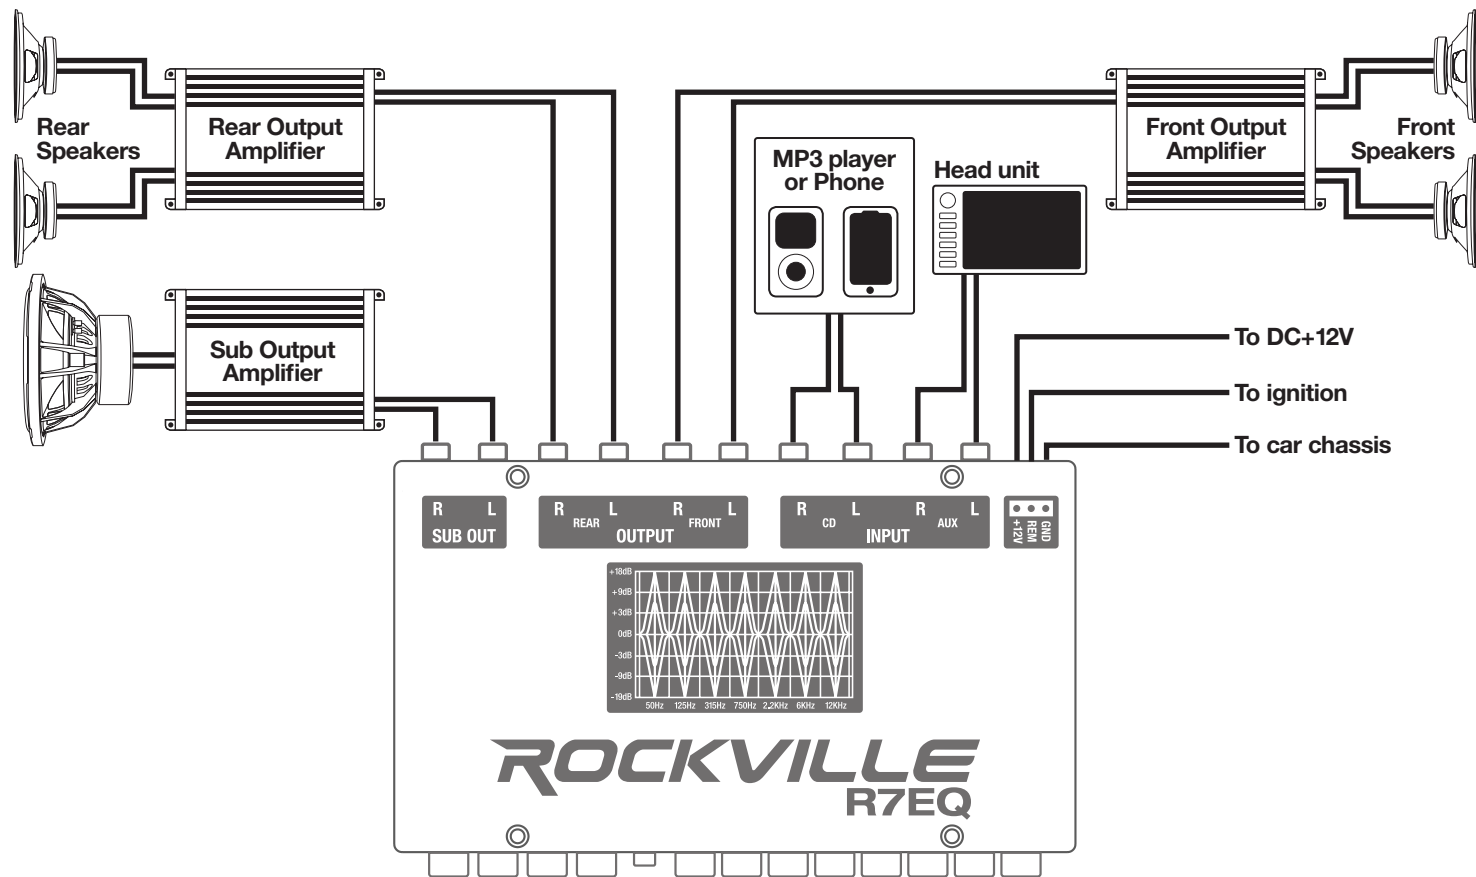


Mounting Instructions

Secure the bracket to the unit using 2 of the included 3mm x 6mm screws.

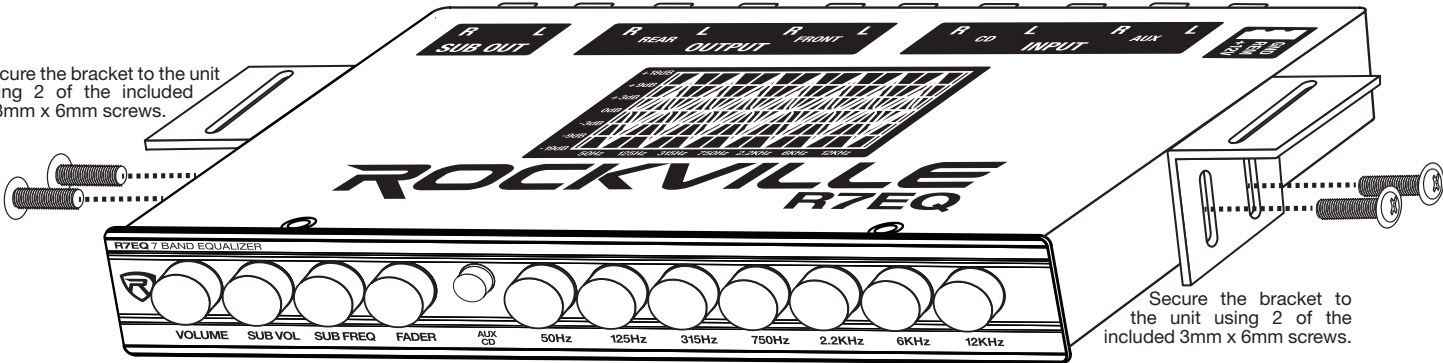

Secure the bracket to the unit using 2 of the included 3mm x 6mm screws.

Use the included #8 metal screws to mount the unit to any surface. To adjust the bracket's position, loosen the screws securing it to the unit's chassis and slide it up or down as needed. Once you've set the desired position, tighten the screws. Note that the bracket can also be reversed to accommodate specific mounting requirements.

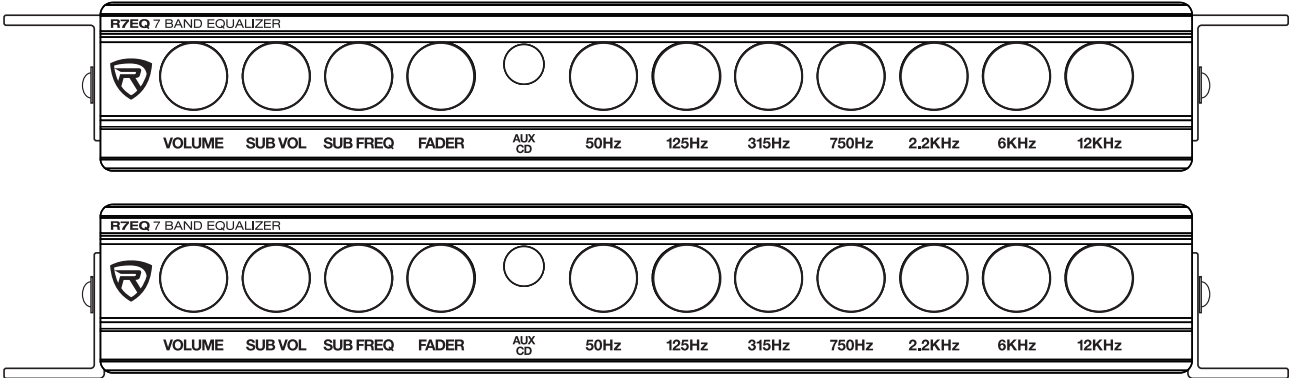

Troubleshooting

PROBLEM	SOLUTION
No power	Check all power connections.
No sound	1. Check that all cables are plugged in correctly. 2. Check the R7EQ volume settings. 3. Make sure the proper input source is selected. 4. Check the volume settings of connected input devices. 5. Check your amplifier settings.

Features / Specifications

- 7 adjustable bands of equalization (50Hz, 125Hz, 315Hz, 750Hz, 2.2KHz, 6KHz, and 12KHz)
- Each band is adjustable from -18dB to +18dB
- Adjustable subwoofer level & frequency controls (40Hz – 250Hz)
- Built-in crossover
- Built-in 7 volt line driver
- Blue LED lights on each rotary knob
- Front, rear, and sub preamp outputs
- Aux input with gain knob to adjust aux volume
- Strong metal chassis with high quality rotary knobs for all controls
- Amazing quality with low distortion (built with top quality components)
- Frequency response: 20Hz – 20KHz $\pm$ 1dB
- S/N Ratio: 101dB
- Crossover rolloff: 18dB per octave
- Input impedance: 10K
- Input sensitivity: 200mv per channel is 7V
- THD: 0.01%
- Input: 12V
- Output: 15V
- Power requirement: 11 – 16V DC
- Unit dimensions in inches: 7.04" x 4.72" x 1.1"



ROCKVILLE